

PRE FABRICATED MOBILE TOILETS



PRE FABRICATED MOBILET
EASY TO TRANSPORT (ONLY 4 PANELS & 1-ROOF)
EASY TO INSTALL ON SITE WITHIN 30 MINUTES
6 PRE FIXED NUT & BOLTS
MADE FROM HOLLOW SECTION & IRON SHEET
LIGHT WEIGHT.
EASY TO RE LOCATE
EASILY CONVERTS IN TO VIP LATRINE
VARIOUS OPTIONS AVAILABLE
INSECT PROOF SCREENED LOUVERS VENT
GOOD CROSS VENTILATIONS
EPOXY PAINTED AT BOTTOM PARTS
PROVISION FOR VIP LATRINE FACILITIES
INSIDE ALUMINIUM CLADING (OPTIONAL)

www.dynamicsouthsudan.com

DYNAMIC MOBILET


PRE ARRANGEMENT'S REQUIRED

CONSTRUCTED SEPTIK TANK/PIT TANK
1500-WIDE X 1800-LENGTH X150 MM THICK RCC SLAB
WITH PIT HOLE MOUNTED ON PIT TANK
100 MM DIA HOLE FOR AIR VENT
4 NOS 3"X3" HOLES FOR FIXING MOBILET ON SLAB
EQUALLY ARRANGED
AFTER MOUNTING MOBILET JUST FINISH FLOOR WITH
CEMENT PLASTER FROM INSIDE AND OUT SIDE
NOW READY TO USE AFTER ONE DAY



TECH SPEC

DYNAMIC MOBILET SCHEMATIC DRAWING

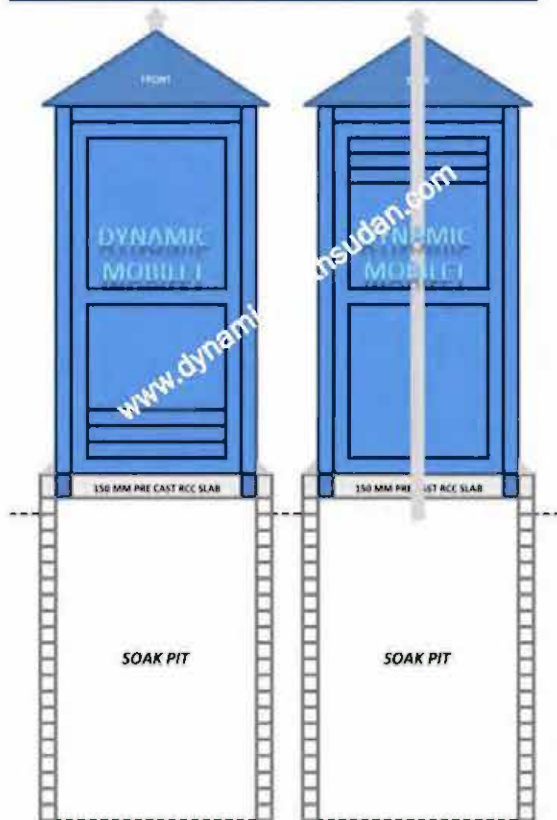

- * DIMENSION : 1.22X1.22X 2.80 ROOF LEVEL
- * GROSS WEIGHT:
- * COMPONENTS:
 - 3 FOLDING PANELS INCLUDING SCREENED VENTILATED LOUVERS ON BACK SIDE
 - 1 FOLDING PANEL INCLUDING SWING DOOR & SCREENED VENTILATED LOUVERES
 - 1 FOUR WAY SLOPING MS ROOF
 - DOOR LOCKING OUT SIDE & DOOR STOPPER INSIDE

OPTIONAL:

- OUTLET ENTRY (100 MM DIA) FOR VIP ENGLISH TYPE W/C
- INLET ENTRY FOR 15 MM DIA GI WATER PIPE FOR FLUSH TANK & WASHER
- TOILET PAPER ROLL STAND
- HALF ALUMINIUM WALL CLADDING FOR VIP FINISH & WATER PROOFING.
- PROVISION FOR LAMP HANGING IN MIDDLE OF ROOF
- AIR VENT WITH COWL FROM PIT TO ROOF LEVEL

WE DELIVER WHAT WE PROMISE

INNOVATIONS



QUALITY



DELIVERY



Thank you

CONTACT

DYNAMIC CONSTRUCTION (SS) CO LTD

PLOT NO 408-409, NYAKURON WEST, JABEL ROAD
JUBA-SOUTH SUDAN

E MAIL: marketing@dynamicsouthsudan.com

Mob: +211959001169

MOBILE TOILETS WITH BIO DIGESTER

