


200 mm compacted gravel/marrum.
230 mm thick plinth wall.

Depth of foundation to be determined from site.
600x200 mm Mass concrete strip of mix 1:3:6.

SECTION A-A

DOOR AND WINDOW SCHEDULE			
MARK	D1	W1	
DESCRIPTION	Purpose made Aluminium door	Purpose made metallic window	
VIEW	2,000	008	
QUANTITY	1	2	

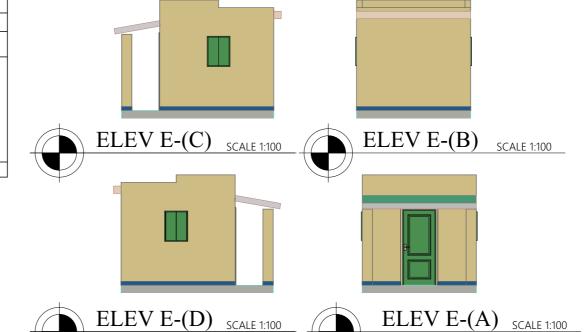

GENERAL NOTES

REFERENCES

1. All Architectural Drawings shall be read in conjunction with the structural drawings and descrepancies so discovered must be reported

DIMENSIONS

- 1. All dimensions are in meter and plain mellimeters unless stated otherwise.
- Under no circumstances should scalling be done on this drawing

CONSTRUCTION

- 1. All load bearing walls should be constructed in hollow concrete blocks
- 2.Murrum filling shall be laid in layers not exceeding 200mm and compacted well mechanically before another layer is added.
- 3. Always use approved material for Damp proofing layer at plinth level

NO. DATE	DESCRIPTION
NO. DAIL	DESCRIPTION

CONSULTANTS



LOKITENG ENGINEERING CONSULTANTS AND CONTRACTORS CO. LTD

CLIENT



Finn Church Aid

PROJECT TITLE

PROPOSED RENOVATION OF TIINDOKA VTC YAMBIO, WES, SOUTH SUDAN

DRAWING TITLE

BLOCK PLAN SECURITY GUARD ROOM

Drawn by	Checked by	
Oni Emmanuel +211920772471	Eng. Manson Isaac Nyara +211925994945	
Date: NOV 2023	Scale: As Shown	
Sheet No. 001		