




Side view

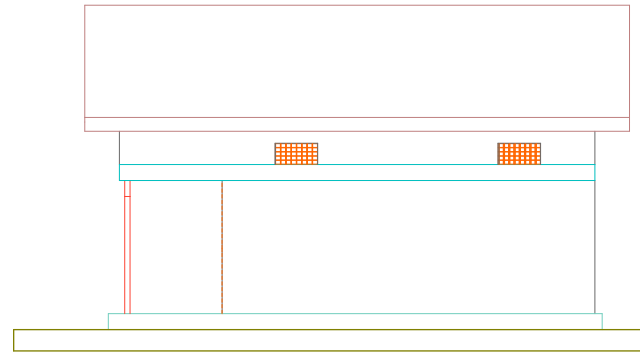

side view

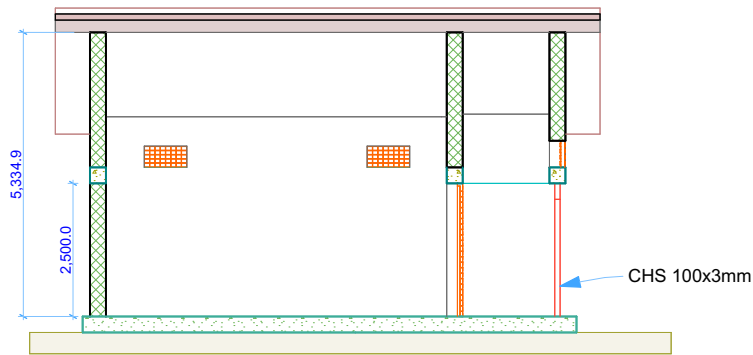

Section S-16

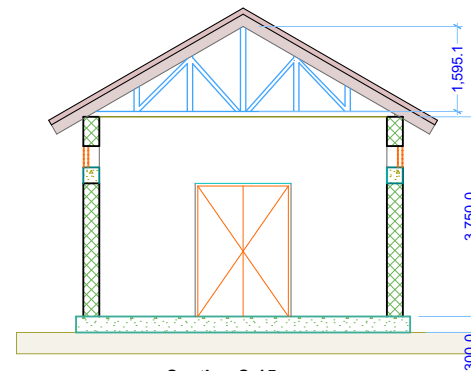

Section S-15

No.	Desc-	Qty	Size
1	W1	4	400x800
2	W2	2	500x800
Ventilates schedule			
Door schedules			
No.	Desc-	Qty	Size
1	D	1	1800x2500


**Foundation and Wall details**

- All dimension are in MM unless a unit is specified
- Excavation Average is 0.7 depth x 0.5 m width
- One and half brick for the foundation wall up to the G. beam
- Parameter wall in one brick wall


**Roofing details**

- Use all hard timber unless specified
- 2x4 wall plate, King post, rafters and its webs
- 2x 3 purline
- 2x6 beam
- 1x9 facial board soft treated timber
- using hoop iron for jointing the timber and R6 bar for tightening the wall plate
- paint the timber with wood preserver
- Use corrugate prepainted iron sheet of G28 nail on the gable roof with rubber washer


**Community Store in Agok**

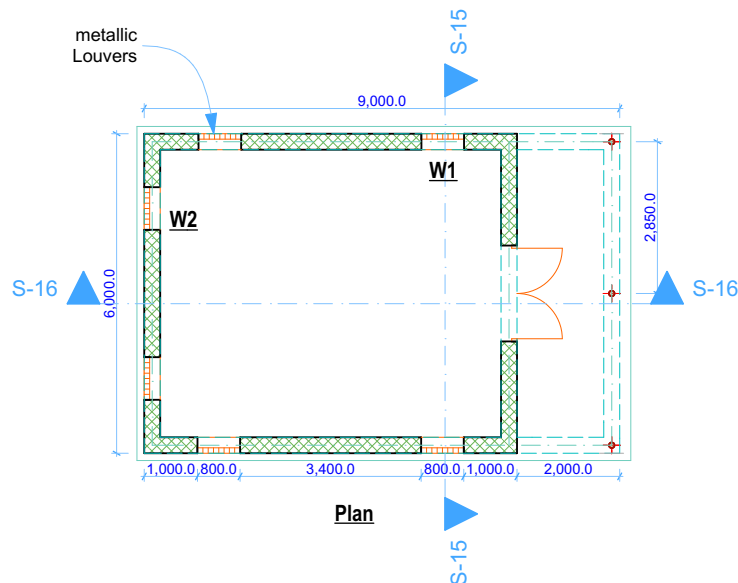

Plan

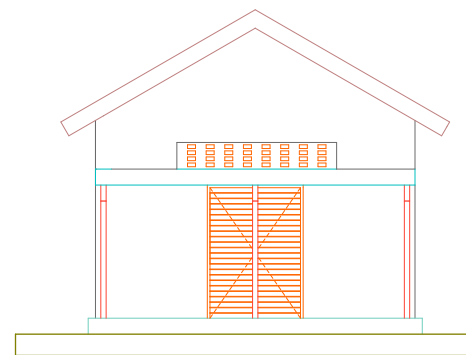

Front view

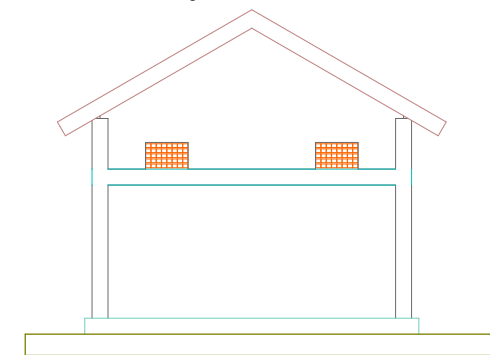

Back side

Scale: 1:100