

Roofing and Ceiling details

- 1x9 timber fascia board


Ceiling:

- Use Decorated suspended ceiling with all it requirement


Three Rooms

1. Donning
2. Doffing, and
3. Morgue

Lot 3



Section -01

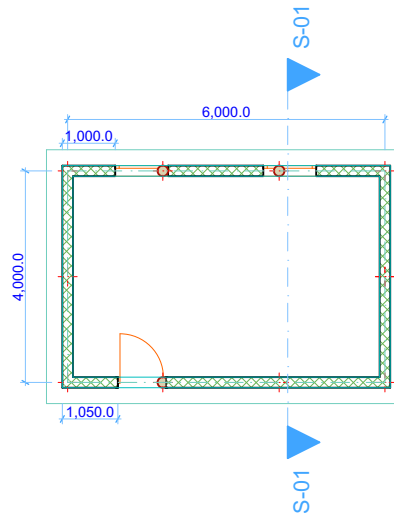

Plan View

Exterior, Interior Wall and Floor Details

Exterior wall:

- Use 6Y12 as tension and compression where Y12@150c/c as stirrups and concrete at M20
- 200 mm thick of well burnt red bricks bedded in cement sand mortar @ 1:3 reinforced with hoop iron every after 60mm
- Apply 20 mm thick cement sand (seived)1:3 plaster finished and rough skirtped plastering (will be directed)
- Apply 1 coat of budget emulsion paint and 2 coats of weather guard painted(color will be advised)

Interior Wall:

- Apply 20 mm thick cement sand (seived)1:3 plaster finished
- Apply 20mm cement sand (1:4) mortar, lime putty (1:10 finished) with
- 1coat of budget emulsion ,paint 2 finishing coats of silk vinyl emulsion paint (color will be advised)
- 2 coats 150mm high skirting of approved oil paint

Floor Details

- Use tile 300x300mm at the cement sand mortar of 1:3 rooms, varanda and corridors
- Screed all the aprone in cement metallic

NOTES

1. All dimensions are in MM unless or otherwise specified.
2. Use figured dimension only. Donot scale off the drawing
3. use hoop iron to reinforce the wall at the intervals of 400mm at every alternate course
4. Water meter level should be @mini 300mm above the ground level
5. The architect shall not accept any liabilities for works which has not be expressly instructed in writing to suprise or for any any omission or deviations from this drawing (s) nor shall take rrsponsibility for works handed by nominated contractor

Double Shutter Doors schedule

| No. | Desc- | Qty | Size |
|-----|-----------------------------|-----|------------|
| D1 | fabricated metal glass door | 3 | 2200 X 900 |

sliding Windows schedules

| W | Metal with glasses | 4 | 1400 X 1200 |
|---|--------------------|---|-------------|
|---|--------------------|---|-------------|

PROJECT TITLE

Proposed Upgrading of Isolation Unit for Yei River County

FUNDED BY AA



german humanitarian assistance

DEUTSCHE HUMANITÄRE HILFE

Implemented by: Malteser International



Malteser International

Order of Malta Worldwide Relief