
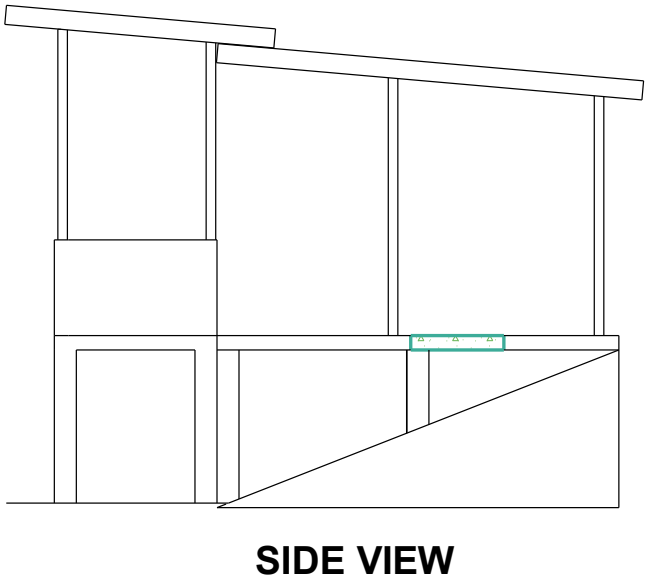
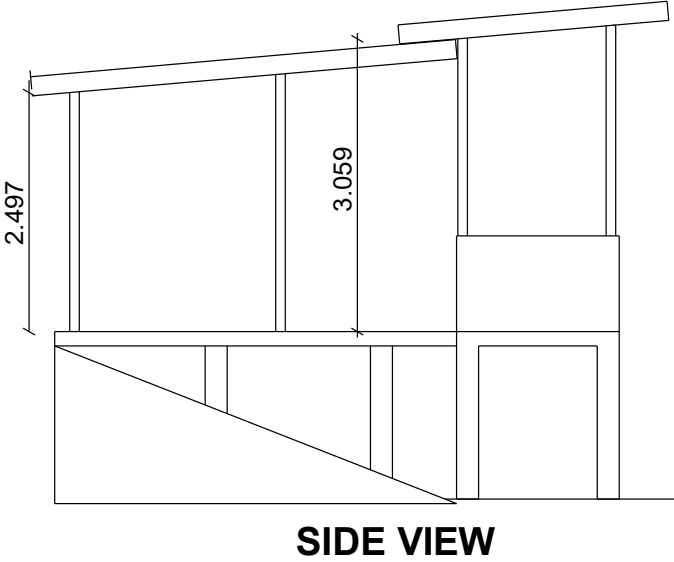
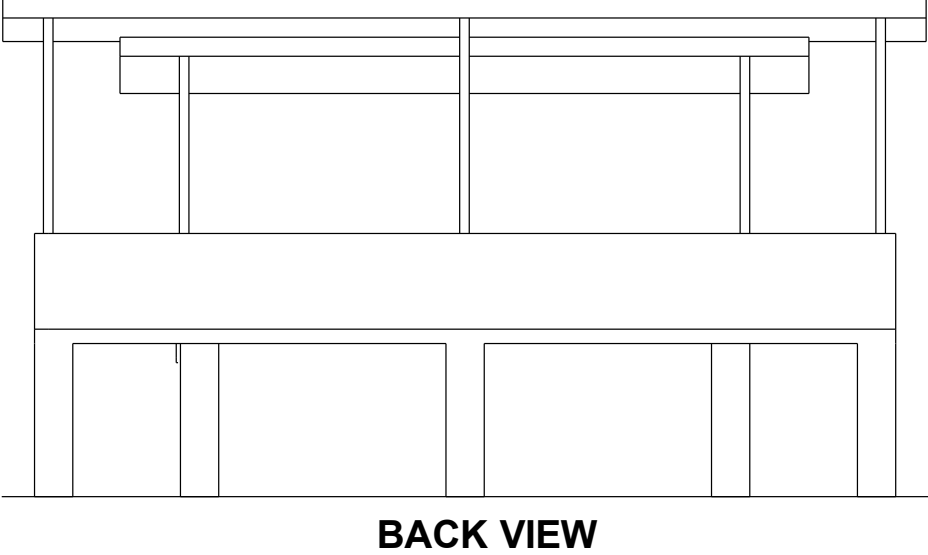
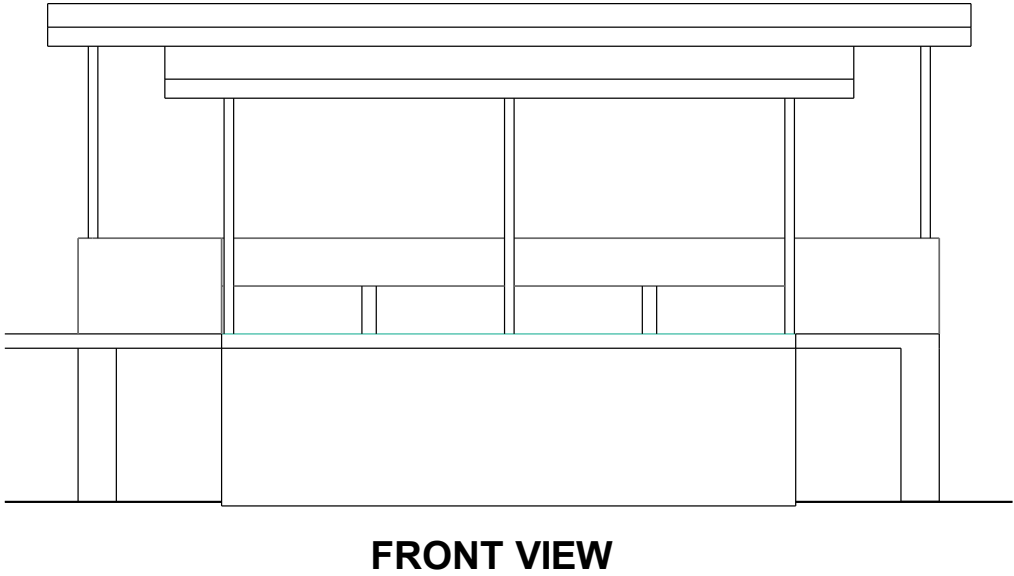


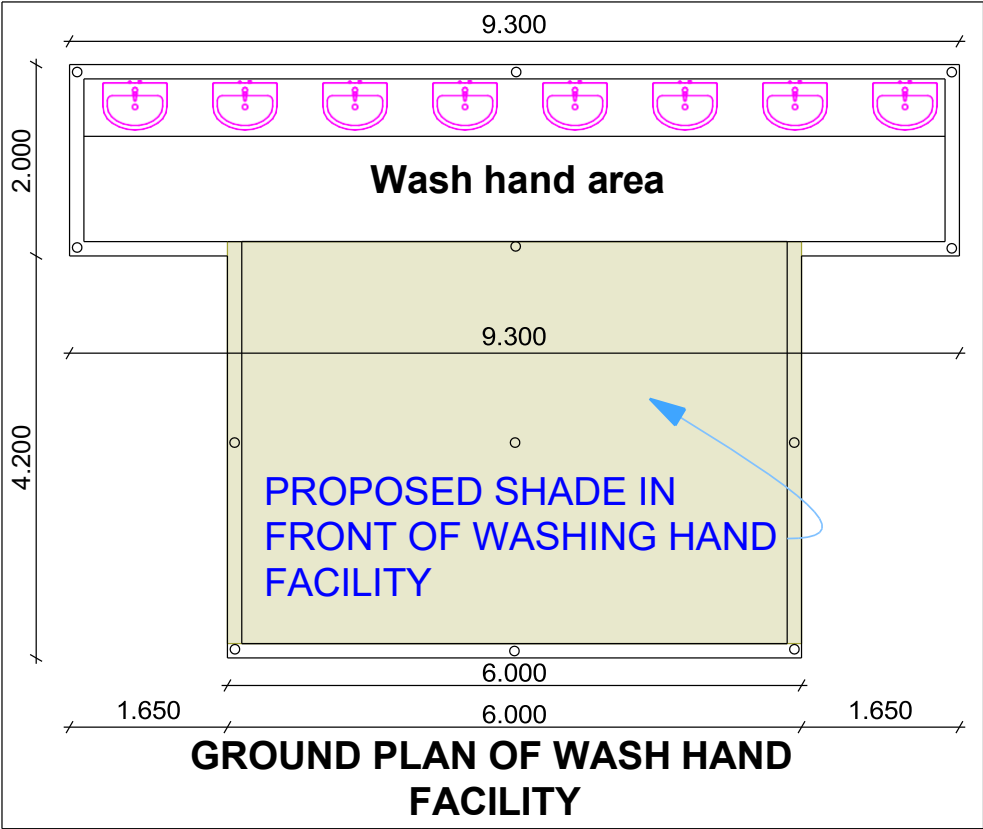

GENERAL NOTES

- 1- All Dimensions to be read and not scaled off the drawing.
- 2- Any discrepancy to be reported to the Architect Immediately.
- 3- All walls under 200mm thickness to have hoop iron at alternate course.
- 4- All RC works to be as per S.E.s, drawing and details.
- 5- All drainage pipe under slab to be encased in 150mm thick concrete surround.
- 5- Pv denoted permanent ventilation and is to be provided where shown.
- 6- Water meter to be 300mm high above the ground level.
- 7- All sanitary works to entire satisfaction of MOH and local authority.
- 8- Dpc to be three-ply bituminous felt and approved by the architect.
- 9- All doors and windows schedule and instructions.
- 10- All timbers to be treated with approved quality anti-termite.
- 11- All electrical work to be carried out by a licenced electrician.

PROJECT DETAILS

PROJECT NAME;Rehabilitation of Nimule Main Port health

PROJECT LOCATION;Nimule Check Point
Magwi County Eastern
Equatoria State,

CLIENT DETAILS